

深圳市光辉通信技术有限公司 GB-Link 深圳巾光辉地信技术有限公司 Shenzhen GB-Link Technology Co,. LTD Http://www.GB-Link.com

GB-Video-R

3Gbps Video SFP Optical Receiver, PIN photodetector

Features

- **HD-SDI SFP Receiver available**
- SD-SDI SFP Receiver available
- 3G-SDI SFP Receiver available
- SMPTE 297-2006 Compatible.
- Metal enclosure for Lower EMI
- PIN photodetector
- Supports video pathological patterns for SD-SDI, HD-SDI and 3G-SDI
- Compliant with SFP MSA and SFF-8472 with duplex LC receptacle
- Digital Diagnostic functions available through the I2C interface
- Compatible with RoHS
- +3.3V single power supply
- Operating case temperature:

Standard: 0 to +70°C

Applications

- SMPTE 297-2006 Compatible Electrical-to-Optical Interfaces.
- HDTV/SDTV Service Interfaces.

Description

The video series transceivers are high performance, cost effective modules for duplex video transmission application over single mode fiber.

The receiver is designed to receive data rates from 50Mbps to 2.97Gbps and is specifically designed for robust performance in the presence of SDI pathological patterns for SMPTE 259M,

F/2,D Building, Fuxin Industrial Area, 3rd Yangxia Street, Shajin Town, Shenzhen, China

Tel: 86-755-27683696



深圳市光辉通信技术有限公司 GB-Link 深圳市光辉通信技术有限公司 Shenzhen GB-Link Technology Co., LTD

Http://www.GB-Link.com

SMPTE 344M, SMPTE 292M and SMPTE 424M serial rates. The module is fully compliant with SMPTE 297M-2006.

The receiver is consists of a PIN photodiode integrated with a trans-impedance preamplifier (TIA) and MCU control unit. All modules satisfy class I laser safety requirements.

The receivers are compatible with SFP Multi-Source Agreement (MSA) and SFF-8472. For further information, please refer to SFP MSA.

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Supply Voltage	Vcc	-0.5	4.5	V
Storage Temperature	Ts	-40	+85	°C
Operating Humidity	-	5	85	%

Recommended Operating Conditions

Parameter	Symbol	Min	Typical	Max	Unit	
Operating Case Temperature	Standard	Tc	0		+70	°C
Operating Case Temperature	I	10				°C
Power Supply Voltage	Vcc	3.13	3.3	3.47	V	
Power Supply Current	Icc			150	mA	
Data Rate			3		Gbps	

Optical and Electrical Characteristics

Parameter	Symbol		Min	Typical	Max	Unit	Notes
			Receiver				
Rise/Fall Time	SD-SDI	tr/tf			270	ps	1
(20%~80%)	HD-SDI				270		

F/2,D Building, Fuxin Industrial Area, 3rd Yangxia Street, Shajin Town, Shenzhen, China

Tel: 86-755-27683696



GB-Link 深圳市光辉通信技术有限公司 Shenzhen GB-Link Technology Co., LTD 深圳市光辉通信技术有限公司

Http://www.GB-Link.com

		3G-SDI				270		
	PRBS and	SD-SDI			70	200		
	colour	HD-SDI			50	135		
Total Output	bar	3G-SDI			70	100	ps	
Jitter		SD-SDI			200	300	μδ	
	pathological	HD-SDI			115			
		3G-SDI			120			
Ce	entre Waveleng	th	λc	1260		1580	nm	
		SD-SDI				-22	dBm	
Receiver	Sensitivity	HD-SDI				-22	dBm	
(PF	RBS)	3G-SDI				-22	dBm	
		SD-SDI				-20	dBm	
Receiver	Sensitivity	HD-SDI				-22	dBm	
(Patho	logical)	3G-SDI				-22	dBm	
R	eceiver Overloa	ıd		0			dBm	3
	LOS De-Assert		LOS _D			-22	dBm	
	LOS Assert		LOS _A	-29			dBm	
I	LOS Hysteresis			1		4	dB	
Data Ou	Data Output Swing Differential		Vout	650	800	1000	mV	2
			High	2.0		Vcc	V	
	LOS		Low			0.8	V	

Notes:

F/2,D Building, Fuxin Industrial Area, 3rd Yangxia Street, Shajin Town, Shenzhen, China

Tel: 86-755-27683696

^{1.} Rise and fall times, 20% to 80%, are measured following a fourth-order Bessel-Thompson filter with a bandwidth of 0.75 x clock frequency corresponding to the serial data rate

^{2.} PECL input, internally AC-coupled and terminated.

^{3.} Internally AC-coupled.



深圳市光辉通信技术有限公司 GB-Link 深圳市光辉通信技术有限公司 Shenzhen GB-Link Technology Co,. LTD

Http://www.GB-Link.com

Timing and Electrical

Parameter	Symbol	Min	Typical	Max	Unit
LOS Assert Time	t_loss_on			100	μs
LOS De-assert Time	t_loss_off			100	μs
Serial ID Clock Rate	f_serial_clock			280	KHz
MOD_DEF (0:2)-High	V _H	2		Vcc	V
MOD_DEF (0:2)-Low	V _L			0.8	V

Diagnostics Specification

Diagnostics openitoation								
Parameter	Range	Unit	Accuracy	Calibration				
Temperature	0 to +70	°C	±3°C	Internal / External				
Voltage	3.0 to 3.6	V	±3%	Internal / External				
RX Power	-20 to -6	dBm	±3dB	Internal / External				

I2C Bus Interface

The I2C bus interface uses the 2-wire serial CMOS E2PROM protocol. The serial interface meets the following specifications:

- 1. Support a maximum clock rate of 280Khz.
- 2. Input/Output levels comply with LVCMOS/LVTTL or compatible logics.

Low: 0 - 0.8 VHigh: 2.0 - 3.3 VUndefined: 0.8 - 2.0 V

F/2,D Building, Fuxin Industrial Area, 3rd Yangxia Street, Shajin Town, Shenzhen, China



深圳市光辉通信技术有限公司

Http://www.GB-Link.com

Pin Definitions

Pin Diagram

Top of Board					
20	NC				
19	NC				
18	NC				
17	NC				
16	NC				
15	VCC_RX1				
14	VEE_RX1				
13	RD+				
12	RD-				
11	VEE_RX1				

Bottom of Board (as viewed through top of board)					
1	NC				
2	NC				
3	NC				
4	NC				
5	I ² C CLK				
6	I ² C DATA				
7	VEE_RX1				
8	LOS1				
9	VEE_RX1				
10	VEE_RX1				

Pin Descriptions

2000							
Pin	Signal Name	Description	Plug Seq.	Notes			
1	NC	Not Connected	1				
2	NC	Not Connected	3				
3	NC	Not Connected	3				

F/2,D Building, Fuxin Industrial Area, 3rd Yangxia Street, Shajin Town, Shenzhen, China

Tel: 86-755-27683696



深圳市光辉通信技术有限公司

Shenzhen GB-Link Technology Co,. LTD *Http//www.GB-Link.com*

6

4	NC	Not Connected	3	
5	I2C CLK	SCL Serial Clock Signal	3	Note 1
6	I2C DATA	SDA Serial Data Signal	3	Note 1
7	VEE_RX1	Receiver1 Ground	3	
8	LOS1	Loss of Signal	3	Note 2
9	VEE_RX1	Receiver1 Ground	1	
10	VEE_RX1	Receiver1 ground	1	
11	VEE_RX1	Receiver1 ground	1	
12	RD-	Inv. Received Data Out	3	Note 3
13	RD+	Received Data Out	3	Note 3
14	VEE_RX1	Receiver1 ground	1	
15	VCC_RX1	Receiver1 Power Supply	2	
16	NC	Not Connected	2	
17	NC	Not Connected	1	
18	NC	Loss of Signal	3	
19	NC	Not Connected	3	
20	NC	Not Connected	1	

Notes:

Plug Seg.: Pin engagement sequence during hot plugging.

- 1) These are the module definition pins. They should be pulled up with a $4.7k\sim10k\Omega$ resistor on the host board. The pull-up voltage shall be VccR.
 - I2C CLK is the clock line of two wire serial interface for serial ID
 - I2C DATA is the data line of two wire serial interface for serial ID
- 2) LOS is an open collector output, which should be pulled up with a 4.7k~10kΩ resistor. Pull up voltage between 2.0V and Vcc+0.3V. Logic 1 indicates loss of signal; Logic 0 indicates normal operation. In the low state, the output will be pulled to less than 0.8V.
- 3) RD-/+: These are the differential receiver outputs. They are internally AC-coupled 100 differential lines which should be terminated with 100Ω (differential) at the user SERDES.

Serial ID Field Memory Map

The module serial Id and calibration information is stored in the E2PROM of the SFP supervising device using the address map.

F/2,D Building, Fuxin Industrial Area, 3rd Yangxia Street, Shajin Town, Shenzhen, China

Tel: 86-755-27683696



Http://www.GB-Link.com

Byte Addr	Bit Size	Name	Description	Value (hex)
0	1	Identifier	Type of transceiver	82
1	1	Ext. Identifier	Extended identifier of type of transceiver	04
2	1	Connector	Code for connector type	07
3	1	Standards Compliance	For SMPTE259M/344M/292M/424M and SMPTE 297M	41
4				
5				
6			Code for electronic or entirel compatibility	
7	7	7 Transceiver	Code for electronic or optical compatibility, Not applicable.	
8				
9				
10				
11	1	Encoding	Code for serial encoding algorithm	30
12	1	BR, Nominal	Nominal signalling rate, units of 100MBd.	1E
13	1	Rate Identifier	Type of rate select functionality, Not applicable	
14	1	Length(SMF,km)	Link length supported for single mode fiber, units of km	14
15	1	Length (SMF)	Link length supported for single mode fiber, units of 100 m	00
16	1	Length (50um)	Link length supported for 50 um OM2 fiber, units of 10 m	00
17	1	Length (62.5um)	Link length supported for 62.5 um OM1 fiber, units of 10 m $$	00
18	1	Length (cable)	Link length supported for copper or direct attach cable, units of m	00
19	1	Length (OM3)	Link length supported for 50 um OM3 fiber, units of 10 m	00
20	16	Vendor name	SFP vendor name (ASCII)	X

F/2,D Building, Fuxin Industrial Area, 3rd Yangxia Street, Shajin Town, Shenzhen, China



GB-Link 深圳市光辉通信技术有限公司 Shenzhen GB-Link Technology Co., LTD 深圳市光辉通信技术有限公司 Http://www.GB-Link.com

21				X
22				X
23				X
24				X
25				X
26				X
27				X
28				X
29				X
30				X
31				X
32				X
33				X
34				X
35				X
36	1	Reserved	Reserved	00
37				00
38	3	Vendor OUI	SFP vendor IEEE company ID	00
39				00
40	16	Vendor PN	Part number provided by SFP vendor (ASCII)	X
41				X
42				X
43				X
44				X
45				X
46				X
47				X
48				X
49				X
50				X
51				X

F/2,D Building, Fuxin Industrial Area, 3rd Yangxia Street, Shajin Town, Shenzhen, China

Tel: 86-755-27683696

Http://www.GB-Link.com



GB-Link 深圳市光辉通信技术有限公司 Shenzhen GB-Link Technology Co,. LTD

Http://www.GB-Link.com

52				Χ
53				X
54				Χ
55				
56		Vendor rev		
57	4		Revision level for part number provided by vendor	V
58	4		(ASCII)	Χ
59				
60			Laser wavelength (Passive/Active Cable	
61	2	Wavelength	Specification Compliance)	
62	1	Unallocated		
63	1	CC_BASE	Check code for Base ID Fields	
64		Options	Indicates which optional transceiver signals are	
65	2		implemented	
66	1	BR, max	Upper bit rate margin, units of %	05
		· ·		
67	1	BR, min	Lower bit rate margin, units of %	5F
68		Vendor SN	Serial number provided by vendor (ASCII)	X
69 70				X
70				X
72				X
73				X
74				Χ
75	16			Χ
76	10			Χ
77				Χ
78				X
79				X
80				X
81				X
82				X
83	0	Data anda	Vandaria manufacturing data and	X
84	8	Date code	Vendor's manufacturing date code	

F/2,D Building, Fuxin Industrial Area, 3rd Yangxia Street, Shajin Town, Shenzhen, China



Http://www.GB-Link.com

1	Diagnostic Monitoring Type	Indicates which type of diagnostic monitoring is implemented(if any) in the transceiver	28
1	Enhanced Options	Indicates which optional enhanced features are implemented(if any) in the transceiver	90
1	SFF-8472Compliance	Indicates which revision of SFF-8472 the transceiver complies with.	X
1	CC_EXT	Check code for the Extended ID Fields	
32	Vendor Specific	Vendor Specific EEPROM	
	1 1 1	Type 1 Enhanced Options 1 SFF-8472Compliance 1 CC_EXT	Type implemented(if any) in the transceiver Indicates which optional enhanced features are implemented(if any) in the transceiver SFF-8472Compliance Indicates which revision of SFF-8472 the transceiver complies with. CC_EXT Check code for the Extended ID Fields

F/2,D Building, Fuxin Industrial Area, 3rd Yangxia Street, Shajin Town, Shenzhen, China

Tel: 86-755-27683696

Fax: 86-755-36652839

Http://www.GB-Link.com



GB-Link 深圳市光辉通信技术有限公司 Shenzhen GB-Link Technology Co., LTD Http://www.GB-Link.com

11

118		0
119		0
120		0
121		0
122		0
123		0
124		0
125		0
126		0
127		0

Digital Diagnostic Monitoring Interface (2-Wire Address A2H)

Byte Addr	Bit Size	Name	Description and Value of the Field
00-01	2	Temp High Alarm	MSB at lower address. 100°C
02-03	2	Temp Low Alarm	MSB at lower address50°C
04-05	2	Temp High Warning	MSB at lower address. 95°C
06-07	2	Temp Low Warning	MSB at lower address45°C
08-09	2	Voltage High Alarm	MSB at lower address. 3.7V
10-11	2	Voltage Low Alarm	MSB at lower address. 2.9V
12-13	2	Voltage High Warning	MSB at lower address. 3.6V
14-15	2	Voltage Low Warning	MSB at lower address. 3.0V
16-17	2	Bias High Alarm	MSB at lower address. 70mA
18-19	2	Bias Low Alarm	MSB at lower address. 8mA
20-21	2	Bias High Warning	MSB at lower address. 65mA
22-23	2	Bias Low Warning	MSB at lower address. 9mA
24-25	2		
26-27	2		

F/2,D Building, Fuxin Industrial Area, 3rd Yangxia Street, Shajin Town, Shenzhen, China



2

2

2

2

2

2

2

2

3

1

TX_I (Offset)

TX_PWR (Offset)

TX PWR

T (Slope)

T (Offset)

V (Slope)

V (Offset)

Reserved

Checksum

(Slope)

28-29

78-79

80-81

82-83

84-85

86-87

88-89

90-91

92-94

95

Set to zero for "internally

Checksum of bytes 0 – 94.

is 01 00.

is 01 00.

is 01 00.

Reserved

calibrated" devices. Value is 00 00.

Set to 1 for "internally calibrated" devices. Value

Set to 1 for "internally calibrated" devices. Value

Set to 1 for "internally calibrated" devices. Value

Http://www.GB-Link.com

30-31	2		
32-33	2	RX Power High Alarm	MSB at lower address. 1dBm
34-35	2	RX Power Low Alarm	MSB at lower address25dBm
36-37	2	RX Power High Warning	MSB at lower address. 0dBm
38-39	2	RX Power Low Warning	MSB at lower address24dBm
40-55	16	Reserved	Reserved
56-59	4		
60-63	4		
64-67	4		
68-71	4		
72-75	4		
76-77	2	TX_I (Slope)	Set to 1 for "internally calibrated" devices. Value is 01 00.

F/2,D Building, Fuxin Industrial Area, 3rd Yangxia Street, Shajin Town, Shenzhen, China



GB-Link 深圳市光辉通信技术有限公司 Shenzhen GB-Link Technology Co., LTD

Http://www.GB-Link.com


96-97	2	Temperature (MSB, LSB)	Internally measured module temperature
98-99	2	Supply Voltage (MSB, LSB)	nternally measured supply voltage in module
100-101	2	Bias1()(MSB, LSB)	Internally measured module bias1
102-103	2	Tx1 Power(MSB, LSB)	Internally measured Tx1 Power Current
104-105	2	Tx2 Power (MSB, LSB)	Internally Measured Tx2 Power Current
106-107	2	Bias2()(MSB, LSB)	Internally measured module bias2
108-109	2	Reserved	Reserved
110	Bit7	Tx Disable State	Digital state of the TX Disable Input Pin.
110	Bit6	Soft Tx Disable	Bit 6
110	Bit5-Bit3	Reserved	
110	Bit2	Tx Fault	Bit 2
110	Bit1		Bit1
110	Bit0	Data_Ready	Bit 0
111	1	Reserved	Reserved
112	1		
113	1		
114-115	Reserved		Reserved
116	1		
117	1		
118-119	2	Reserved	Reserved
120-127	8	Vendor specific	
128-247	120	User EEPROM	User writable EEPROM
248-255	8	Vendor Specific	Vendor specific control functions

F/2,D Building, Fuxin Industrial Area, 3rd Yangxia Street, Shajin Town, Shenzhen, China



Http://www.GB-Link.com

Mechanical Dimensions

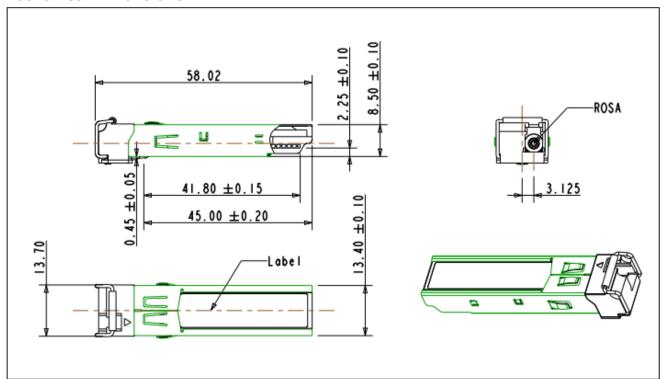

Ordering information

Part Number	Product Description		
GB-Video-R	PIN, 3Gbps,	0°C ~ +70°C, With Digital Diagnostic Monitoring	

E-mail: sales@GB-Link.com Web: http://www.GB-Link.com