

MPO Fanout Patchcord

Features


- ◆ MPO / MTP connector interface patchcord
- ◆ Different options for different installing enviroment
- ◆ SM (9/125), MM (50 or 62.5/125), OM3 Fiber are available
- ◆ 8/12/24 core fiber are available
- ◆ Max 24 core

Application


- ◆ Data Center
- ◆ Cabling system
- ◆ High Density Cable Management
- ◆ QSFP devices

Specification


Item	SM		MM	
Fiber diameter	9/125um		62.5/125um 50/125um	
Insertion loss	<0.3dB	<0.7 dB	<0.5dB	<0.7 dB
Return loss	>60dB		>35dB	
Insert- pull test	500times<0.5 dB			
Operation temperature	-40℃~+80℃			

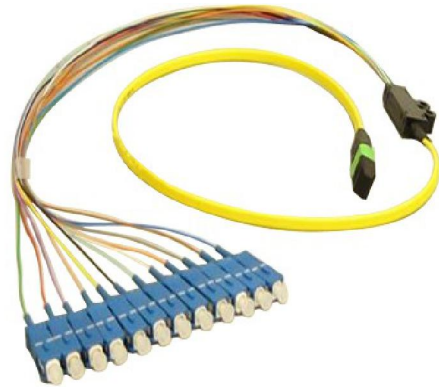

Ribbon cable+Fanout

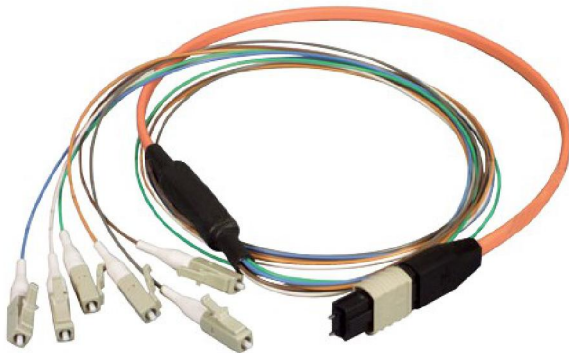

Round cable+Fanout

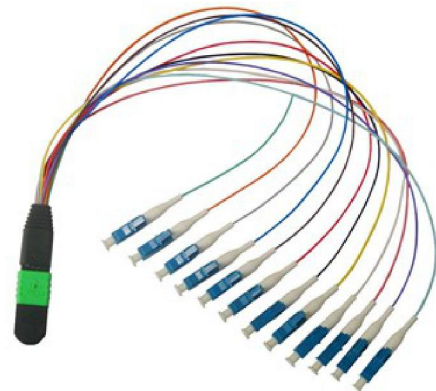

Direct Fanout